


249.00 EUR  
 incl. 19% VAT, plus [shipping](#)

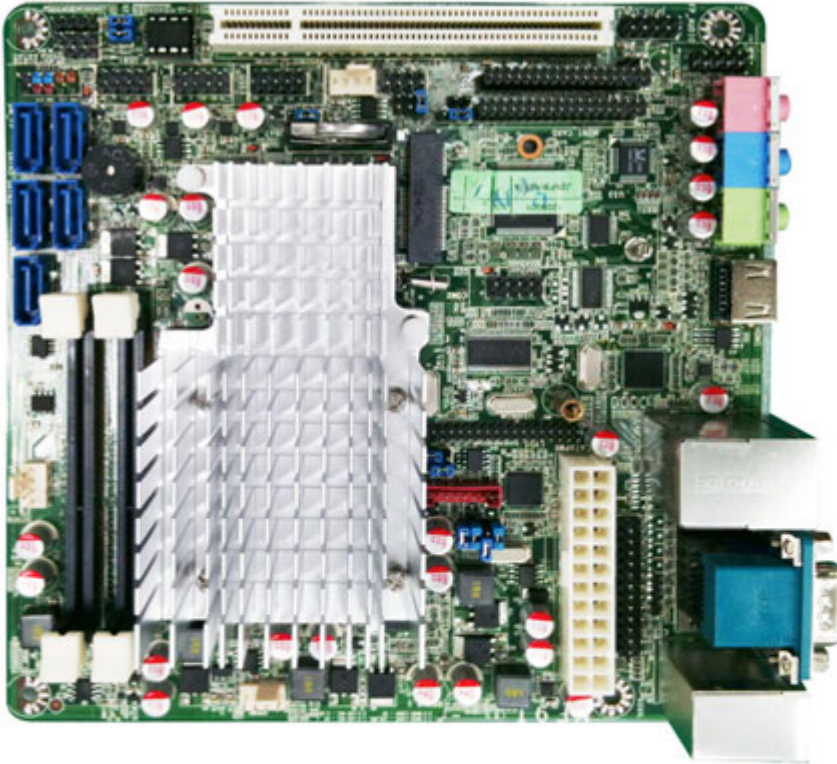

Support: [Datasheet](#)

- INTEL® Cedar Trail-D Processor D2550 + ICH10R Chipset
- Support 2 \* DDR3 1066MHz Single CH up to 4GB
- Support 5 \* Serial ATAII (3Gb/s) with RAID 0, 1, 5 & 10
- Realtek ALC662 6-CH HD Audio CODEC
- 1 \* 24 bits Dual Channel LVDS header
- Supports 1 \* Intel 82574L Gigabit LAN
- Supports JetWay 2nd Gen. Daughter Board (4x PCI Express interface)
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

JetWay JNF9I-2550 also supports the following daughter boards:

1. JADE4RTLANG: 4x Realtek GBe LAN (PCI Express)
2. JADE4INLANG: 4x Intel GBe LAN (PCI Express)
3. JADE4COMCB: 4x Serial Ports
4. JADE4NV13M: NVIDIA NV13M, with 1GB DDR3 on board, DVI-I, HDMI and Display port output

• <b>CPU</b>	• INTEL® Cedar Trail-D Processor D2550 CPU (1.86GHz)
• <b>Chipset</b>	• INTEL® ICH10R Express chipset
• <b>Memory</b>	• 2 * DDR3 1066MHz Single CH SO-DIMM up to 4GB
• <b>Expansion Slots</b>	• 1 * PCI slot • 1 * full size MINI PCI-E

• <b>Storage</b>	<ul style="list-style-type: none"> <li>• 5 * Serial ATAIII 3Gb/s with RAID 0, 1, 5 &amp; 10</li> <li>• 1 * mSATA (Selectable with Mini PCI-E)</li> </ul>
• <b>Audio</b>	• Realtek ALC662 6-CH HD Audio CODEC
• <b>Ethernet LAN</b>	• 1 * Intel 82574L PCI-E Gigabit LAN
• <b>LVDS</b>	• Onboard 24-bits Dual channel connector
• <b>USB</b>	• Embedded 10 * USB 2.0/1.1
• <b>Special Features</b>	<ul style="list-style-type: none"> <li>• Support ACPI S3</li> <li>• Support CPU Smart FAN</li> <li>• Support Watch Dog</li> </ul>
• <b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>• 4 * USB 2.0/1.1 ports</li> <li>• 1 * PS/2 port</li> <li>• 1 * RJ-45 port</li> <li>• 1 * COM port (COM1 for RS232/422/485)</li> <li>• 1 * VGA port</li> <li>• 1 * HDMI Port</li> <li>• 3 * Audio phone jack</li> </ul>
• <b>Internal I/O</b>	<ul style="list-style-type: none"> <li>• 3 * USB 2.0/1.1 headers for 6 USB 2.0 ports</li> <li>• 1 * Parallel header</li> <li>• CPU /NB / Chassis Fan connectors;</li> <li>• 1 * GPIO header &amp; 1 Parallel headers</li> <li>• 1 * COM header</li> <li>• 1 * Chassis Intrusion header</li> </ul>
• <b>BIOS</b>	• AMI 16MB UEFI DIP Flash ROM
• <b>Form Factor</b>	• Mini ITX Form Factor(170mm x 170mm)
• <b>Functional</b>	• NAS, Storage, Networking Appliance, NVR, DVR
• <b>Certificate</b>	• CE, FCC, RoHS
• <b>Temperature</b>	<ul style="list-style-type: none"> <li>• Operating within 0~60 centigrade</li> <li>• Storage within -20-85 centigrade</li> </ul>