


649.00 EUR

incl. 19% VAT, plus [shipping](#)

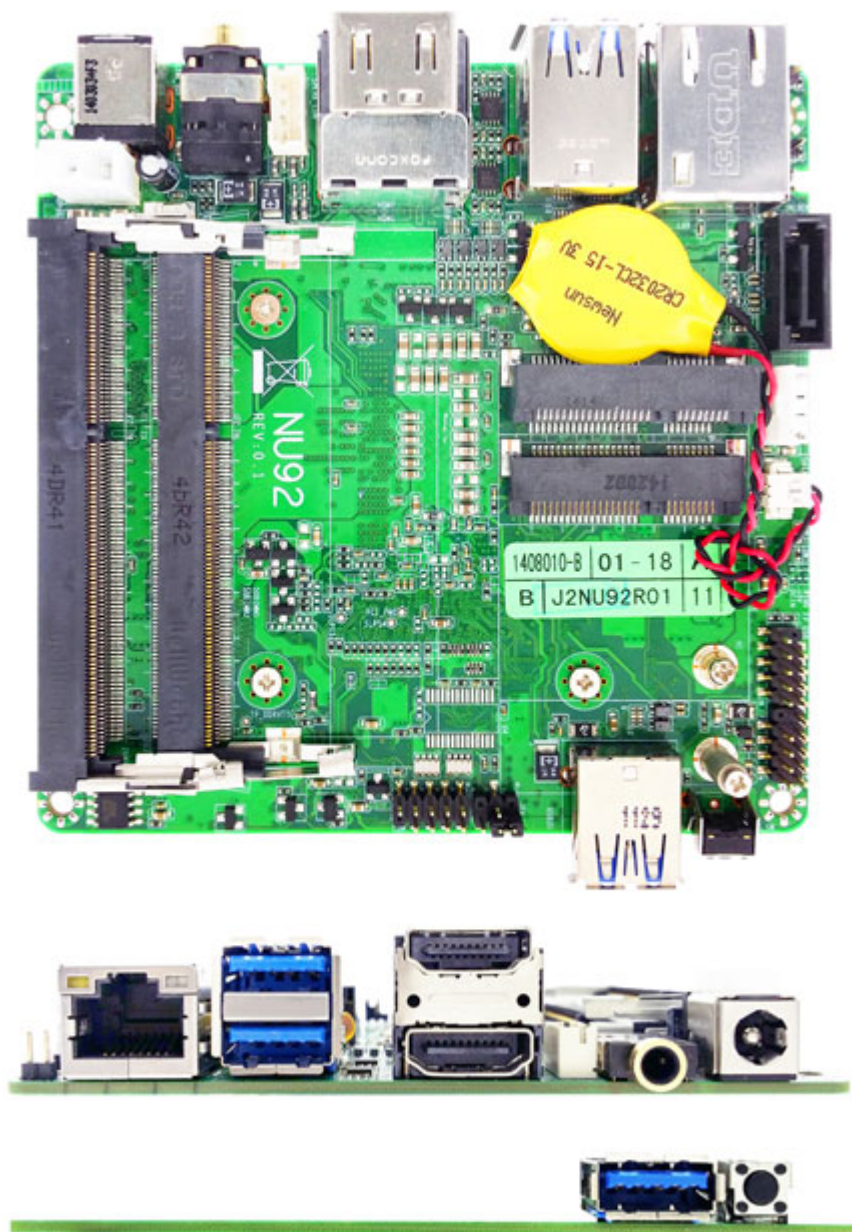

- INTEL® Haswell-U / Broadwell-U SoC Processor
- Support 2 * SO-DIMM DDR3L 1333/1600 up to 16 GB
- 9~24V Wide range DC-in
- Support INTEL® i218LM Gigabit PHY LAN
- Onboard 1* Half size Mini PCIe socket
- Onboard 1*mSATA socket
- 3 * USB3.0, 2 * USB2.0
- 2 * HDMI1.4 ports
- Support slim Fan design
- NUC Form Factor(101 * 101mm)

Form Factor	
Dimensions	NUC (101 X 101 mm)
Processor System	
CPU	Intel® Haswell-U / Broadwell-U SoC Processor
Core Number	(By CPU)
Max Speed	(By CPU)
L2 Cache	(By CPU)

Chipset	- SoC
BIOS	- AMI 128Mb Flash ROM
Expansion Slot	
PCI	- 0
Mini-PCIe	- 1 (half size)
mSATA	- 1 (full size)
PCIe	- 0
CFast Card Socket	- 0
CF Card Socket	- 0
Memory	
Technology	- Two Channel DDR3L 1333/1066 MHz SDRAM
Max.	- 16 GB
Socket	- 2 * SO-DIMM
Graphics	
Controller	- Integrated Intel® HD Graphics
VRAM	- Shared Memory
VGA	- No
LVDS	- No
HDMI	- 2
DVI-I	- No
DisplayPort	- No
MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: INTEL® 218LM
Connector	- 1 x RJ 45
SATA	
Max Data Transfer Rate	- 1 x SATAIII (6.0Gb/s)
External I/O	
VGA	- 0
DVI-I	- 0
HDMI	- 2
DisplayPort	- 0
Ethernet	- 1
USB	- 3 (2 x USB 3.0 at rear & 1 x USB3.0 at front)
Audio	- 1 (Line-out W/SPDIF-out)
Serial	- 0
eSATA	- 0
PS2	- 0
DC-input	- +9~24V DC in Jack
Internal Connector	
USB	- 2 (2 x USB 2.0)
PS/2	- 0
LVDS / inverter	- 0
VGA	- 0
Serial	- 1 (1 x RS232/422/485)
SATA	- 1
mPCIe	- 1 (half size)
Parallel	- 0
mSATA	- 1 (full size)
CIR	- 0
GPIO 8-bit	- 0
Chassis intrusion	- 1
Audio Amplifier Header	- 1
AT mode jumper	- 1

Watchdog Timer

Output	- From Super I/O to drag RESETCON#
--------	------------------------------------

Interval	- 256 segments, 0,1,2...255sec/min
----------	------------------------------------

Power Requirements

Input PWR	- 9~24V DC-In - 2-pin PWR Con
-----------	----------------------------------

Power On	- AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
----------	--

Certifications

Certifications	- CE, FCC, RoHS, REACH
----------------	------------------------

Environment

Temperature	- Operating: 0■– 60■ - Storage: -20■– 85■
-------------	--