


229.00 EUR  
incl. 19% VAT, plus [shipping](#)

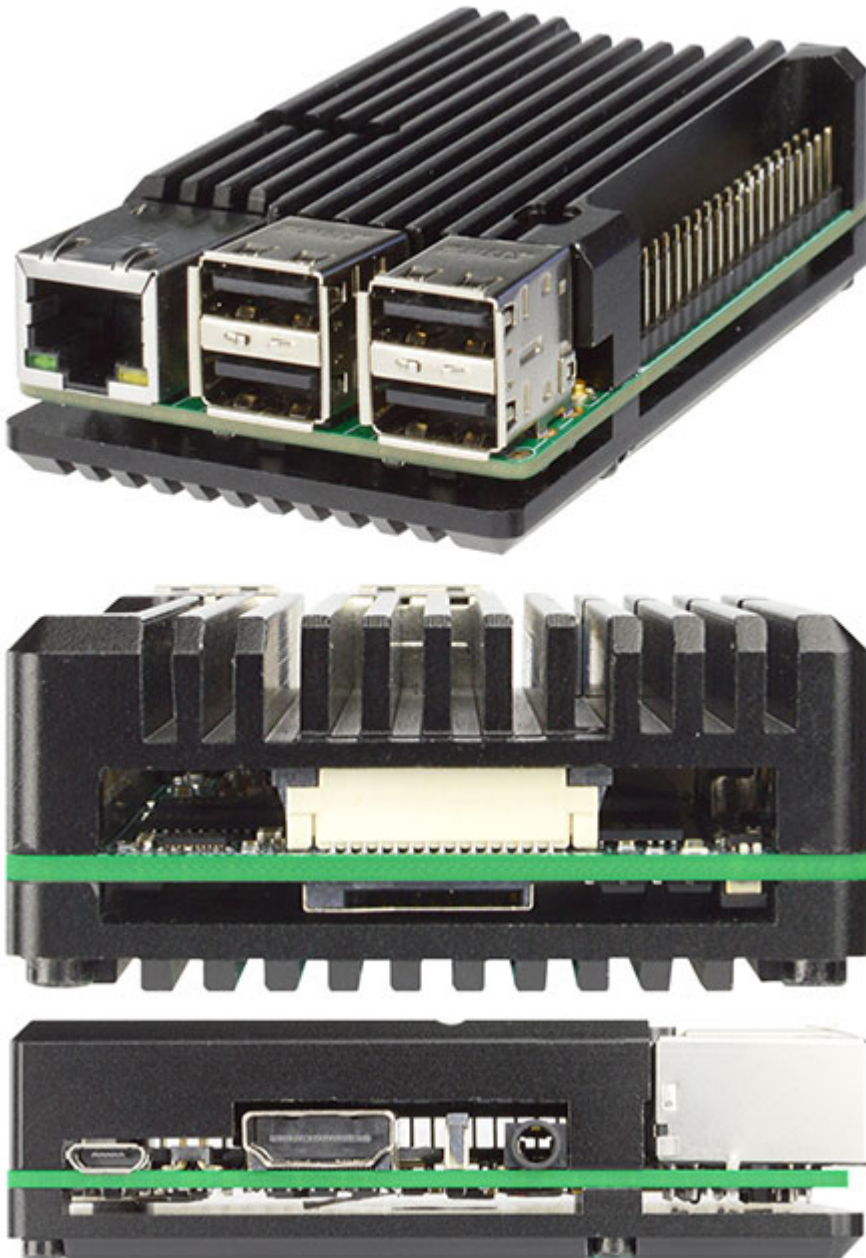

- Rockchip® ARM Cortex A17 RK3288 Quad-core 1.8GHz
- Onboard 1333 /2GB DDR3L DRAM
- Onboard 8G Flash ROM up to 64GB
- 1\* Realtek® Gigabit LAN, 1\* 802.11b/g/n 2.4G WIFI and BT-V4.0
- Support 1\* Micro SD Socket (Max. 64G)
- 4\* USB2.0 , 1\* OTG, 26bit GPIO, 1\* HDMI, 1\* Audio Port
- 5V DC-in

|             |                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------|
| MB Model    | – JR3288A-DG2N (1.8" SBC)                                                                          |
| Part No     | – HBJC924R3288DG2NS                                                                                |
| CPU/Chipset | – Rockchip® ARM Cortex A17 RK3288 1.8GHz Quad core<br>– Rockchip® RK808-B                          |
| Memory      | – 2GB/1333MHz DDR3L                                                                                |
| Storage     | – 8GB Flash (Max 64GB)                                                                             |
| Network     | – 1 * REALTEK RTL8211E■VB Gigabit LAN<br>– 1 * REALTEK RTL8723BS 802.11b/g/n 2.4G WIFI and BT-V4.0 |

|                    |                                                                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Rear Panel I/O     | <ul style="list-style-type: none"> <li>– 1 * RJ45</li> <li>– 4 * USB2.0</li> <li>– 1 * Micro SD Socket (Front)</li> </ul>                       |
| Side Panel I/O     | <ul style="list-style-type: none"> <li>– 1 * OTG / DC Jack</li> <li>– 1 * HDMI (Max Resolution: 1920×1080@60Hz)</li> <li>– 1 * Audio</li> </ul> |
| Internal Connector | <ul style="list-style-type: none"> <li>– 26bit GPIO, 1* I2C</li> <li>– 1* MIPI DSI</li> <li>– 1* MIPI CSI</li> </ul>                            |
| Power Source       | <ul style="list-style-type: none"> <li>– DC 5V-3.0A</li> <li>– AC 100~240V input</li> </ul>                                                     |
| Compliance         | <ul style="list-style-type: none"> <li>– RoHS, ErP Ready</li> </ul>                                                                             |
| Temperature        | <ul style="list-style-type: none"> <li>– Operating Temperature: -10 ~ 60° C</li> <li>– Storage Temperature: -20 ~ 65° C</li> </ul>              |
| Dimensions         | <ul style="list-style-type: none"> <li>– 87.0(W) x 56.0(D) x 2.9(H) mm</li> <li>– Shelf: 110.0(W) x 111.1(D) x 33.6(H) mm</li> </ul>            |
| OS Support         | <ul style="list-style-type: none"> <li>– Android 5.1, Linux Debian 9.0</li> </ul>                                                               |
| Warranty           | <ul style="list-style-type: none"> <li>– 1 Year limited warranty</li> </ul>                                                                     |