




159.95 EUR  
incl. 19% VAT, plus [shipping](#)

- Intel Bay Trail !
- 4x2.42Ghz CPU !
- 2x Gigabit LAN !
- 4x RS232 !

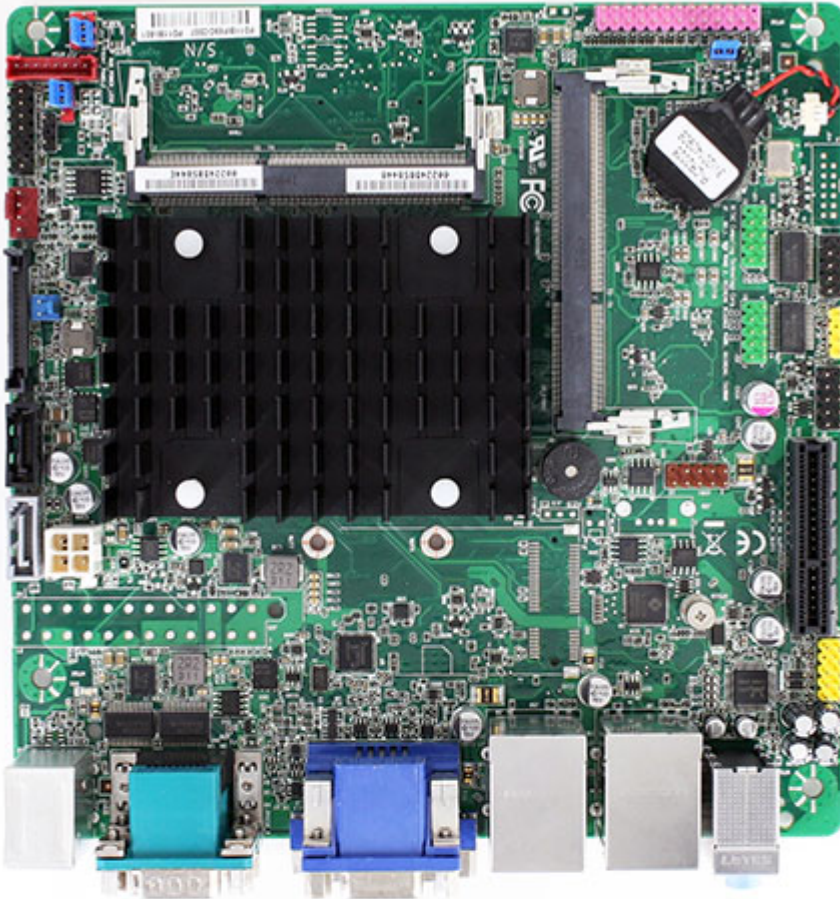

This board is produced by MITAC, the OEM producer of Intel D2500CC. This board is identical with Intel D2500CC (even BIOS-compatible) and available until at least 2015.

This model can be connected directly to a 12V DC power source.

- Successor model of Intel D2500CC-E mainboard
- Quad-core Intel Celeron J1900
- DVI-I for full dual-independent display support
- 4 serial ports & headers for multiple peripherals
- Boards are suitable for other devices; ATM, Kiosk, POS, etc.

|                       |                                                                                                                                                                                                                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                  | Mitac PD11BI-PSU (Intel D2500CC2)                                                                                                                                                                                                                                                      |
| Form Factor           | Mini-ITX Mainboard                                                                                                                                                                                                                                                                     |
| CPU                   | Intel® Celeron™ J1900 (4x 2.42GHz)<br>2MB Cache, VT-x/Intel64-compatible                                                                                                                                                                                                               |
| Graphics              | VGA + DVI-I + LVDS                                                                                                                                                                                                                                                                     |
| Memory                | 2x SO-DDR3L [Low Voltage, 1.35V] 1066/1333, 8GB max, Dual channel                                                                                                                                                                                                                      |
| Power                 | P4 12VDC                                                                                                                                                                                                                                                                               |
| LAN                   | 2x Realtek RTL8111G-CG 10/100/1000 MBit                                                                                                                                                                                                                                                |
| Connectors (rear)     | <ul style="list-style-type: none"> <li>- 2x USB 2.0</li> <li>- 2x USB 3.0</li> <li>- 2x LAN RJ-45</li> <li>- 3x Audio</li> <li>- 2x PS/2</li> <li>- 2x RS232</li> <li>- 1x DVI-I</li> <li>- 1x VGA</li> </ul>                                                                          |
| Audio                 | 6+2 Channel HD Audio                                                                                                                                                                                                                                                                   |
| Connectors (internal) | <ul style="list-style-type: none"> <li>- 2x SATA-II (3GB/s)</li> <li>- 2x USB 2.0</li> <li>- 1x Intel Z-U130 USB Header</li> <li>- 1x PCIe x1</li> <li>- 1x PCIe x4 Slot</li> <li>- 2x RS232</li> <li>- 1x Parallel LPT</li> <li>- Front Audio</li> <li>- LVDS (Dual 24bit)</li> </ul> |
| Included              | <ul style="list-style-type: none"> <li>- Mitac PD11BI-PSU (D2500CC2) Mainboard (with 4x 2.42Ghz Bay-Trail CPU)</li> <li>- I/O ATX rear plate</li> <li>- SATA power cable</li> <li>- 1x SATA cable</li> </ul>                                                                           |