




1198.00 EUR

incl. 19% VAT, plus [shipping](#)

- NVIDIA !
- 9x GPIOs !
- 8x POE LAN !

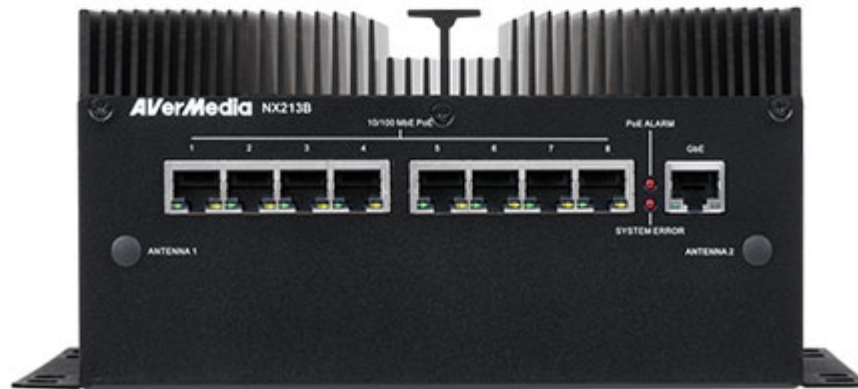

Support:  [Datasheet](#) |  [Manual](#) | [System installation SSD](#)

AVerMedia's AVerAI NX213B Box PC of NVIDIA® Jetson Xavier™ NX is designed as an A.I. NVR (Network Video Recorder) for intelligent surveillance system.

This product provides 8-channel PoE (PSE) ports for IP cameras, a SATA port for storage, 1x mPCIe, 2x USB 3.0, 1x microphone input, 1x speaker output, 1x RS-485 and 20-pin expansion header (I2C, SPI, UART, I2S), 1x HDMI 2.0 out. NX213B can operate in the temperature range from 0°C ~ 60°C (without HDD).

Benefiting from the Jetson Xavier™ NX and DeepStream SDK, it can simultaneously decode and analyze 8-channel 1080p60 IP camera videos.

- Embedded NVIDIA® Jetson Xavier™ NX module
- 8x 10/100 MbE with PoE
- 1x GbE, 2x USB 3.0, 1x 4Kp60 HDMI output
- 20 pins with 1x UART, 2x I2C, 9x GPIOs
- 1x RS-485 (3 pins), 1x Micro-B USB 2.0 for recovery

- 1x mPCIe (Host Interface: USB 2.0)
- Operating temperature: 0°C ~ 60°C (without HDD, with No-Air-Flow)
- Dimension: W:190mm x L:175mm x H:80mm (W:225mm with mounting ears)

| | |
|----------------------------------|---|
| Model | NX213B |
| Type | Box PC |
| NVIDIA GPU SoC Module | NVIDIA® Jetson Xavier™ NX module |
| Compatibility | 1x GbE RJ-45 |
| Networking | 8x 10/100 MbE RJ-45 with PoE |
| Display Output | (Max for the first 4 ports is 15.4W and total power budget is 100W) 1x HDMI 2.0a/b Type-A supports maximum resolution 3840x2160 at 60Hz Operating Temperature 0°C ~ 60°C |
| Temperature | Storage Temperature -40°C ~ 85°C |
| USB | Relative Humidity 40 °C @ 95%, Non-Condensing 1x USB 2.0 Micro-B for recovery |
| Storage | 2x USB 3.0 Type-A (USB 3.2 Gen1 x 1) 16GB e.MMC v5.1 |
| GPIO Expansion | 1x 3.3V UART, 2x I2C, 9x GPIOs |
| Input Power | 54V/2.78A |
| Buttons | Power and Recovery Button (each with a RGB tri-color LED) |
| RTC Battery | Support RTC battery and Battery Life Monitoring by MCU |
| Chassis Dimension/ Weight | W:190mm x L:175mm x H:80mm (W:225mm with mounting ears) |
| Certifications | Weight: 4 Kg CE, FCC,KC |